


MPI

TECHNICAL SPECIFICATIONS

FTP-14BH

BIAS TAP

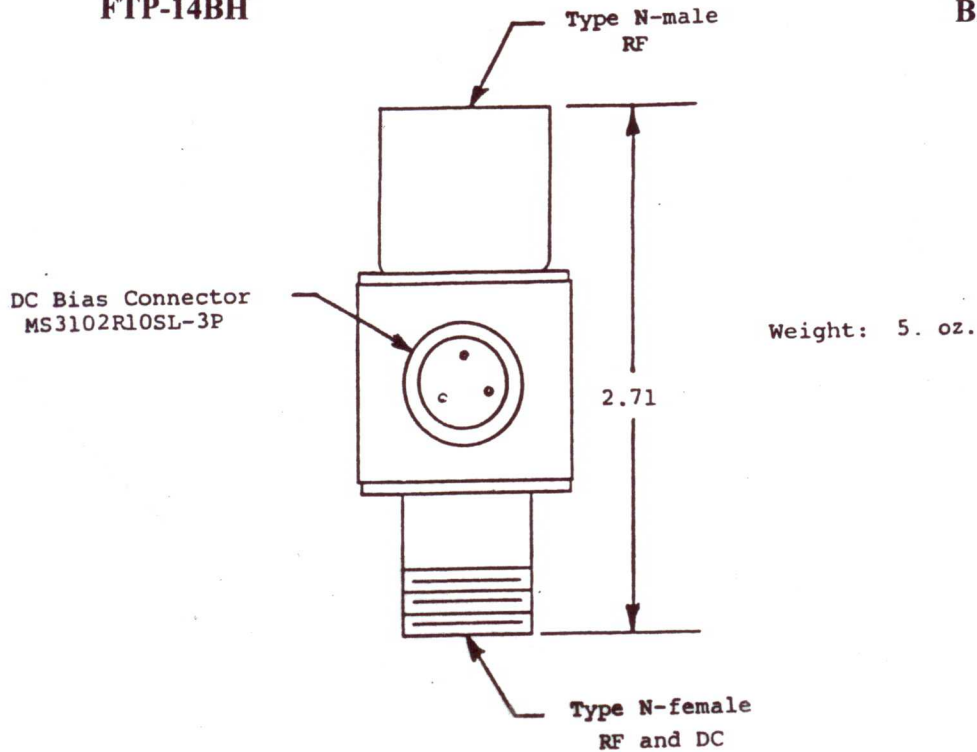

The FTP-14BH Bias Tap is used to provide a DC path to one side of a 50 Ohm transmission line. An integral blocking capacitor isolates the DC from the other side of the line.

Frequency Range 108 - 512 MHz

Insertion Loss 0.20 dB maximum

VSWR 1.3:1 maximum

RF Power 200 W CW

DC Resistance 0.5 Ohm maximum

DC Voltage 200 Volts maximum

DC Current 10 A maximum

OPTION: FTP-14BHR – Provides DC path to the N-male connector.

METROPOLE PRODUCTS, INC.

Metropole Products, Inc., P.O. Box 309, Stafford, Virginia 22555
540-659-2132/Voice 540-659-2133/Fax

Rev. 7/2006