


MPI

TECHNICAL SPECIFICATIONS

FTP-14T

BIAS TAP

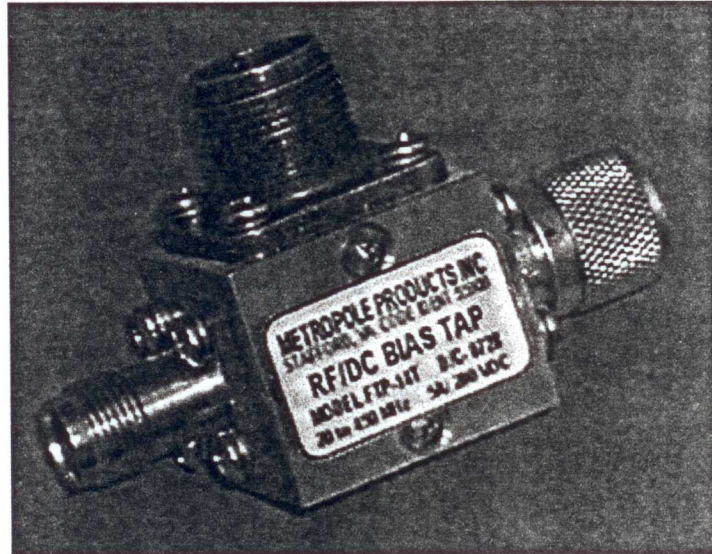

The FTP-14T Bias Tap is used to provide a DC path to one side of a 50 Ohm coaxial transmission line. An integral blocking capacitor isolates the DC from the other side of the line.

Frequency Range	20 - 450 MHz
Insertion Loss	0.2 dB maximum
VSWR	1.3:1 maximum
RF Power	200 W CW
DC Resistance	0.2 Ohm maximum
DC Voltage	200 Volts maximum
DC Current	5 A maximum

OPTION: FTP-14TR – Provides DC path to the TNC-male connector., otherwise DC path is to the female connector.

REV 7/07

METROPOLE PRODUCTS, INC.

Metropole Products, Inc., P.O. Box 309, Stafford, Virginia 22555
540-659-2132/Voice 540-659-2133/Fax