


**MPI**

# TECHNICAL SPECIFICATIONS

**FHC-21**

**DC BLOCK**

**Features high rf power handling, optimum 50 to 400 MHz**

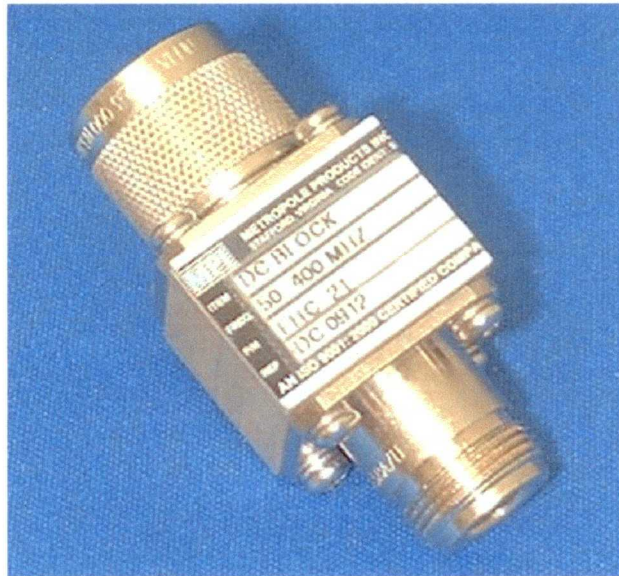

## SPECIFICATIONS

FREQUENCY RANGE	50 MHz to 400 MHz
INSERTION LOSS	0.1 dB Max.
VSWR (Reference 50 Ohms)	1.2:1 Max.
RF POWER INPUT, CW	250 W Max.
BLOCKING VOLTAGE	200 WVDC
WEIGHT	3.5 oz.
SIZE	1.00" X 1.06" X 2.30"

REV 7/2001

## METROPOLE PRODUCTS, INC.

Metropole Products, Inc., P.O. Box 309, Stafford, Virginia 22555  
540-659-2132/Voice 540-659-2133/Fax