




# TECHNICAL SPECIFICATIONS

FHC-21L

DC BLOCK

Features wide frequency range, useable 10 KHz through 512 MHz

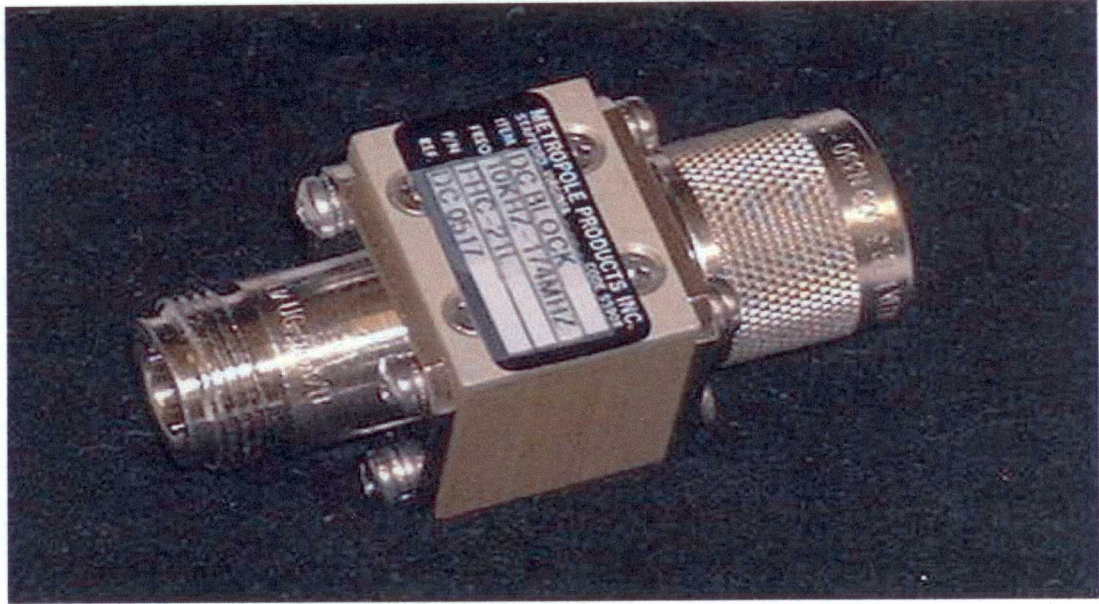

### SPECIFICATIONS

FREQUENCY RANGE	10KHz TO 174 MHz
INSERTION LOSS	0.1 dB Max.
VSWR (Reference 50 Ohms)	1.2:1 Max.
RF POWER INPUT, CW	5 W Max.
BLOCKING VOLTAGE	50 WVDC
WEIGHT	3.5 oz.
SIZE	1.00 X 1.06 X 2.30"

## METROPOLE PRODUCTS, INC.

Metropole Products, Inc., P.O. Box 309, Stafford, Virginia 22555  
540-659-2132/Voice 540-659-2133/Fax