


# TECHNICAL SPECIFICATIONS

## FMA-287 UHF-GPS Diplexer

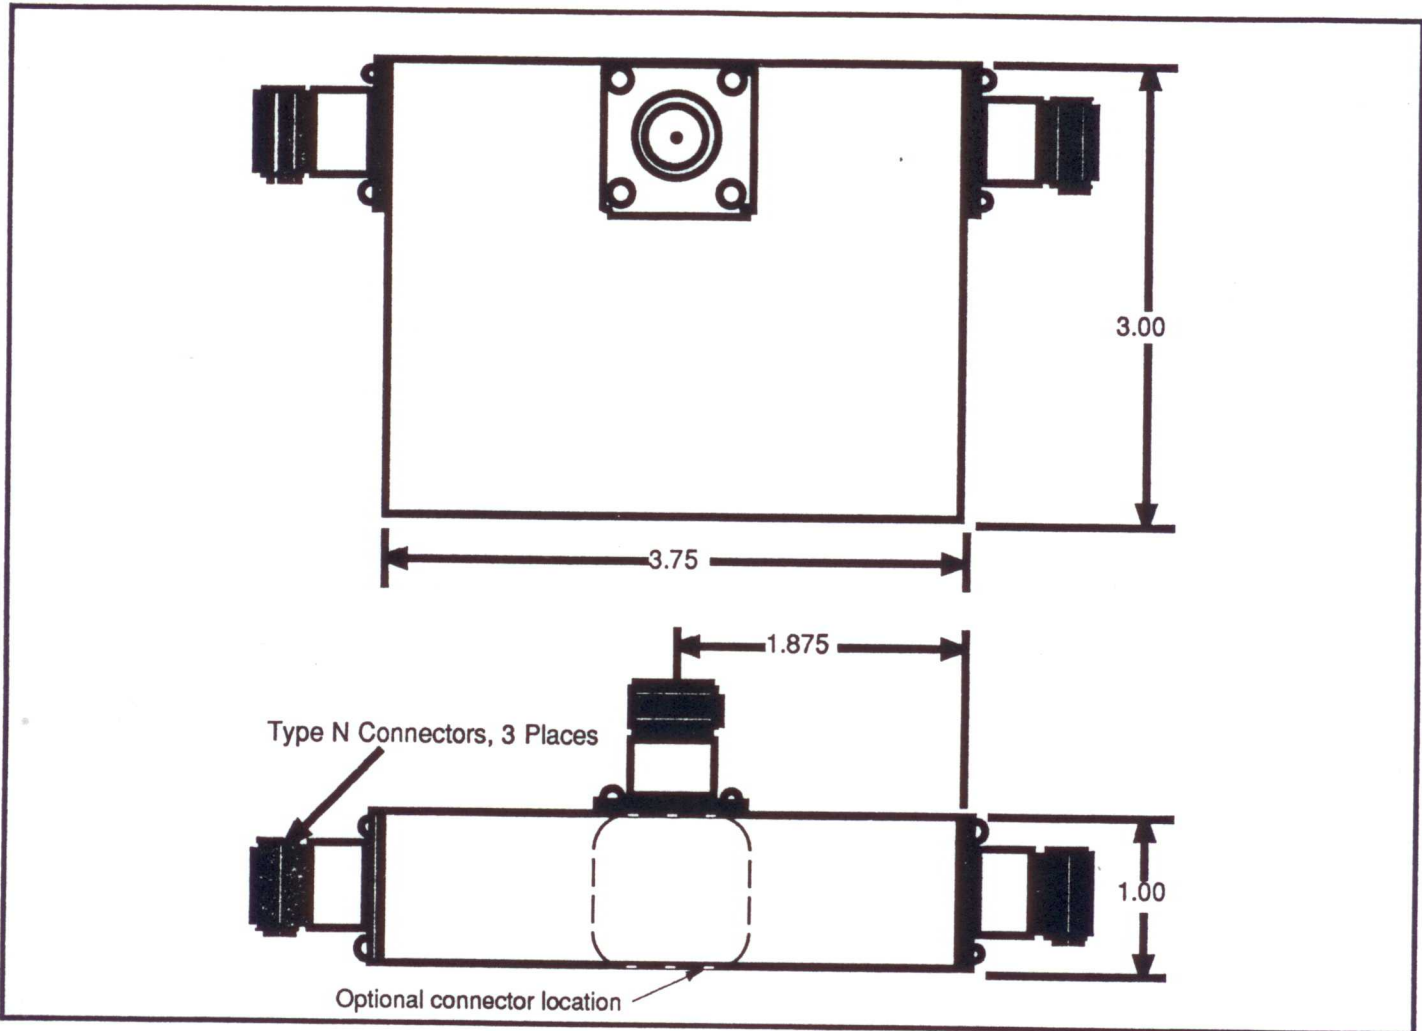

UHF	
Frequency	200-400 MHz
Insertion Loss	0.5 dB max
Isolation	50 dB min
VSWR	1.5:1 max
	100 watts

GPS	
Frequency	1217-1237/1565-1585 MHz
Insertion Loss	0.5 dB max
Isolation	50 dB min
VSWR	1.5:1 max



Metropole Products, Inc  
 P.O. Box 309 Stafford, VA 22554  
 540/659.2132 FAX 540/659.2133