




TECHNICAL SPECIFICATIONS

MBA-249

MINIATURE BANDPASS FILTER

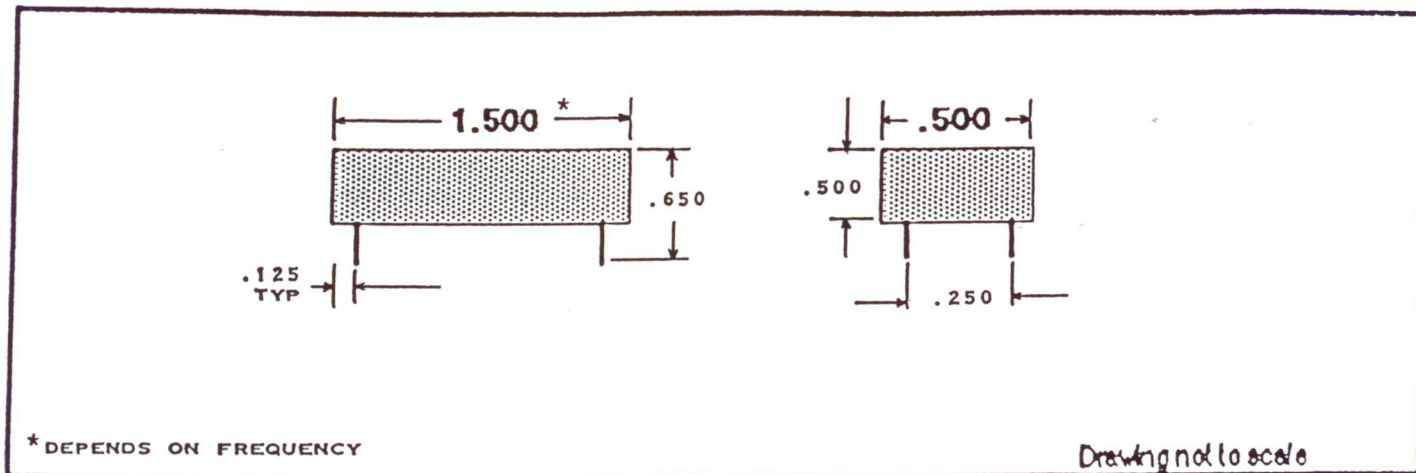

Very low insertion loss and minimal VSWR are achieved in the model MBA-249 miniature plug-in filter. These filters are ideally suited for circuit board and other miniature applications through the use of integral connector pins, although alternative miniature connectors are available on request.

Frequency	2.49 GHz
Bandwidth	57 MHz
Insertion Loss	2.0 dB max.
VSWR	1.5:1 max.
Rejection	40 db min.
Connectors	Pins standard
Design	5 Section
Temperature	-60 - + 160 deg F
Shock	10 g, 5 millisecond
Vibration	10 g
Weight	< 50 grams

METROPOLE PRODUCTS, INC.

Metropole Products, Inc., P.O. Box 309, Stafford, Virginia 22555
540-659-2132/Voice 540-659-2133/Fax

Rev. 4/13/00