


**MPI**

# TECHNICAL SPECIFICATIONS

**PS-101B  
HIGH EFFICIENCY**

**AC-DC POWER SUPPLY  
OPTIMUM FOR AM-212 SERIES LNA**

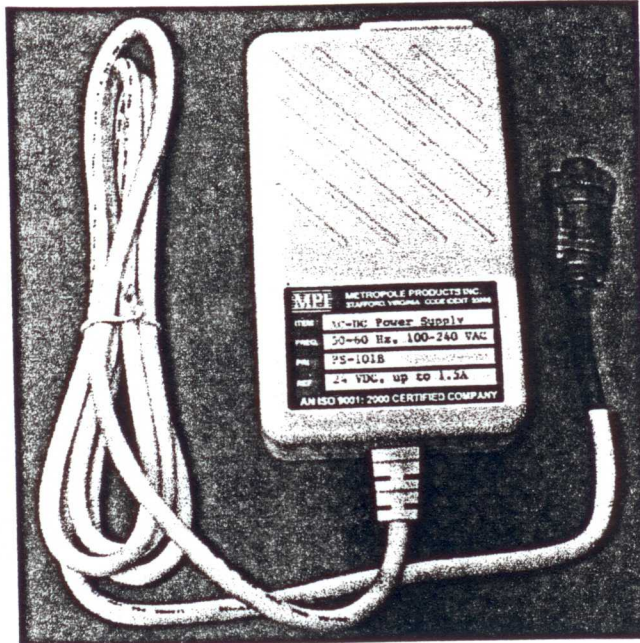

## ELECTRICAL CHARACTERISTICS

**INPUT: 100 to 240 VAC, 50-60 Hz  
3 pin IEC 320 Power Cord**

**OUTPUT: +24 VDC, up to 1.5A  
Ripple and Noise +/- 0.5% V p-p  
Line Regulation 0.2% max  
Short Circuit Protection  
Connector: MS3106R-10SL-3S  
Efficiency: 88% nominal  
Hold-up time: >16ms@1.5A, 115 VAC**

## METROPOLE PRODUCTS, INC.

Metropole Products, Inc., P.O. Box 309, Stafford, Virginia 22555  
540-659-2132/Voice Fax/540-659-2133

Rev. 6/2008