

FBA-454 • BANDPASS FILTER

Description

Wideband, High Selectivity Bandpass

Features

- Low Band VHF
- Medium Power




Metropole Products, Inc.

2040 Jefferson Davis Hwy. • Stafford, Virginia 22554 • 540.659.2132

fx. 540.659.2133 • e. metropole@aol.com

www.MetropoleProducts.com

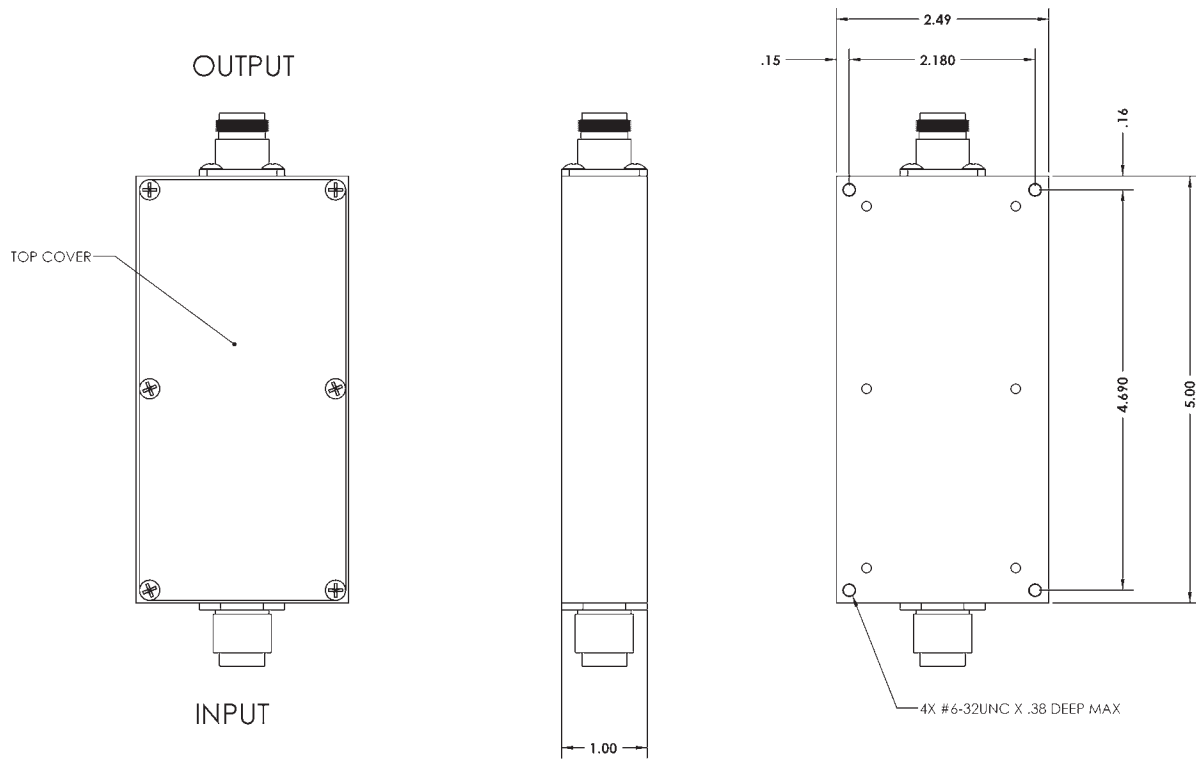

Specifications

Bandwidth, 3 dB.....	30 – 180 MHz
Bandwidth, 1 dB.....	31.5 – 174 MHz
Insertion Loss, Mid Band.....	0.5 dB maximum
VSWR, (1.5:1 nominal).....	1.7:1 maximum
Selectivity, 20 and 220 MHz.....	50 dB minimum
Stopband, 0 – 15 MHz.....	60 dB nominal
Stopband, 225 – 500 MHz.....	60 dB vnominal
Connectors.....	Input – N plug; Output – N jack
Size:.....	1.00" x 2.50" x 5.00" excluding connectors
Weight:.....	10 ounces nominal
Power (Continuous).....	+33 dBm minimum



Metropole Products, Inc.

2040 Jefferson Davis Hwy. • Stafford, Virginia 22554 • 540.659.2132

fx. 540.659.2133 • e. metropole@aol.com

www.MetropoleProducts.com