


MPI

TECHNICAL SPECIFICATIONS

FBV-177

BANDPASS FILTER

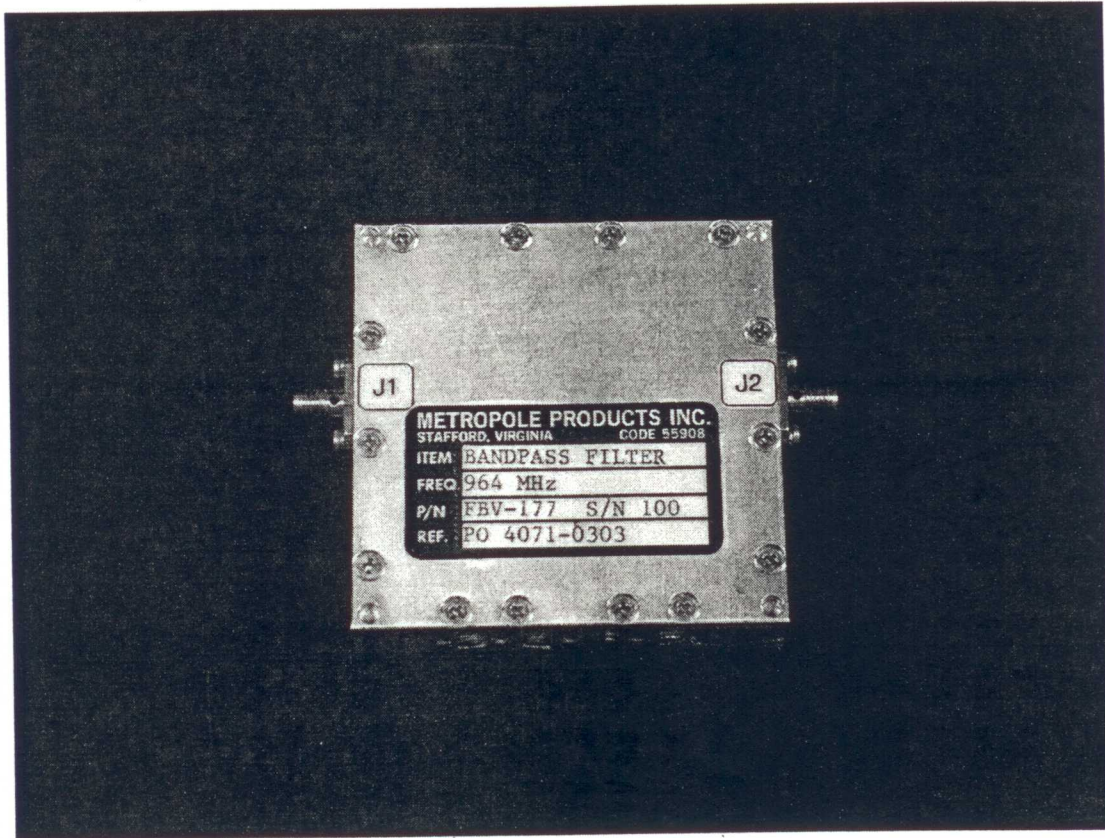

PERFORMANCE CHARACTERISTICS

CENTER FREQUENCY	964 MHz nominal
PASSBAND INSERTION LOSS, 714 to 1214 MHz	0.5 dB max.
PASSBAND VSWR, 714 to 1214 MHz	1.5:1 max.
PASSBAND GROUP DELAY, 714 to 1214 MHz	4 nS min/8 nS max.
STOPBAND, 0-460 MHz	60 dB min.
1.43 to 2.7 GHz	60 dB min.
SELECTIVITY, 40 dB nominal	570 / 1345 MHz
CONNECTORS	Type SMA Female
SIZE	2.63" x 2.75" x .57"
WEIGHT	Approx. 4.6 oz.

METROPOLE PRODUCTS, INC.

Metropole Products, Inc., P.O. Box 309, Stafford, Virginia 22555
540-659-2132/Voice 540-659-2133/Fax

Rev. 4/2003