


MPI

# TECHNICAL SPECIFICATIONS

FMA-343

BROAD BAND TRIPLEXER

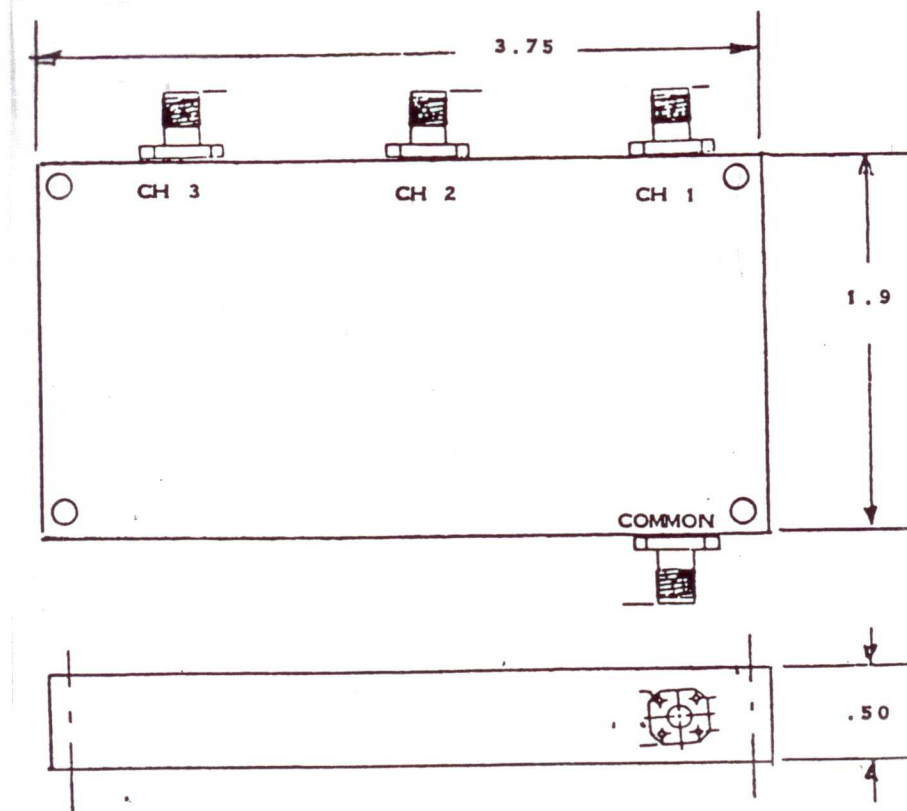

Channel 1 -	500 - 2500 MHz
Channel 2 -	100 - 500 MHz
Channel 3 -	30 - 100 MHz
Crossover	4 dB (Typ)
Loss / Channel	1 dB Max.
VSWR	2.5:1 Max.
Power	50 Watts CW
Connector	SMA
Size	1.90" x 3.75" x 0.5 "

## METROPOLE PRODUCTS, INC.

Metropole Products, Inc., P.O. Box 309, Stafford, Virginia 22555  
540-659-2132/Voice 540-659-2133/Fax

Rev. 4/19/10